


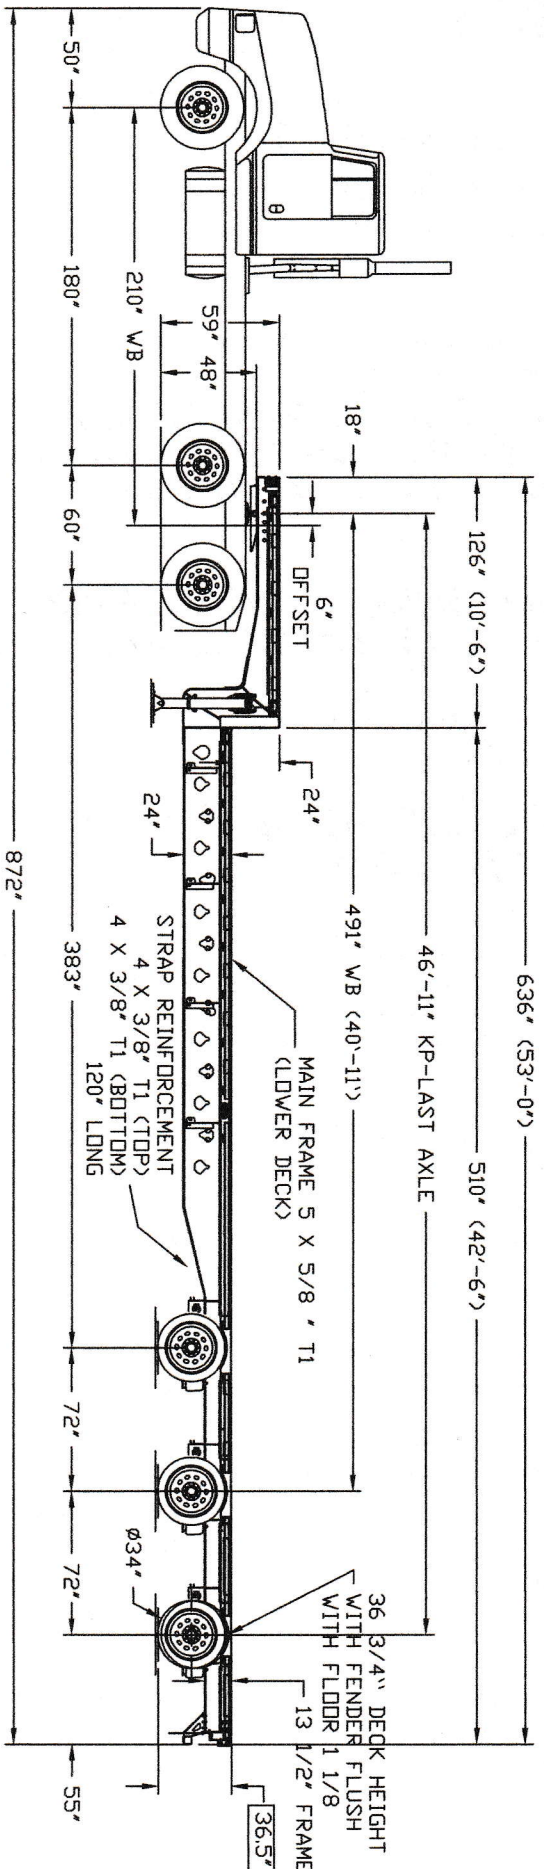

12000 LBS	34400 LBS	43500 LBS	80000 LBS	USA
5500 KG	18000 KG	24000 KG	47500 KG	CANADA

CONFIGURATION NOT ALLOWED IN THESE STATES

- | | |
|--------------|-------------|
| CALIFORNIA | CONNECTICUT |
| FLORIDA | INDIANA |
| RHODE ISLAND | MAINE |
| ILLINOIS | NEW YORK |
| VERMONT | |

GAWR:
 SUSPENSION HT250US-6.5-limited Jounce= 25000 lbs
 AXLE MERITOR HP, 5/8 wall: 25000 LBS nominal
 LINING: MA212/ BRAKE 15x 8 5/8 = 20000 LBS
 TIRE GOODYEAR 265/70R19.5 (Ø34")= 20280 LBS
 RIM ALCOA 19.5 x 7.5 polish = 22060 LBS

GAWR = 20000LBS / AXLE

GVWR = 100000 LBS

S
C